

ICAO Obstacle Light - Beacon Twinapplication

Article no: 10-082FS

Alarm contact

in case of LED or voltage failure

Low intensity

Type A, B und E

Infrared (NVG)

optional



Technical data

Dimension (ØxH):	158mm x 273mm
Weight:	1.3kg
Protection:	Light IP67, Plug IP55
Operating voltage:	110 - 230VAC / 12VDC / 24VDC
Current consumption:	47mA (230VAC) / 220mA (12VDC)
Synchronization:	GPS

Red (LED)

Luminous intensity:	12cd
Wavelength:	623nm

Infrared (optional)

Beam density:	580mW/sr
Wavelength:	850nm
Flash frequency:	0,5Hz (30/min); adjustable

Regulations:	ICAO, Annex 14, Chapter 6 FOCA, AD I-006 D, Guidelines Aeronautical Obstructions EMC (IEC 61000-6-3, IEC 61000-6-2)
--------------	--

Characteristics

- Can be operated as a single beacon or in the twin application
- Automatic GPS synchronization
- Cost efficient
- Weather resistant
- Easy to assemble
- High impact resistant



ICAO


Verkehrstechnik
Technique du trafic
Traffic Control Engineering



Light distribution


Type A

LIGHT DISTRIBUTION RED

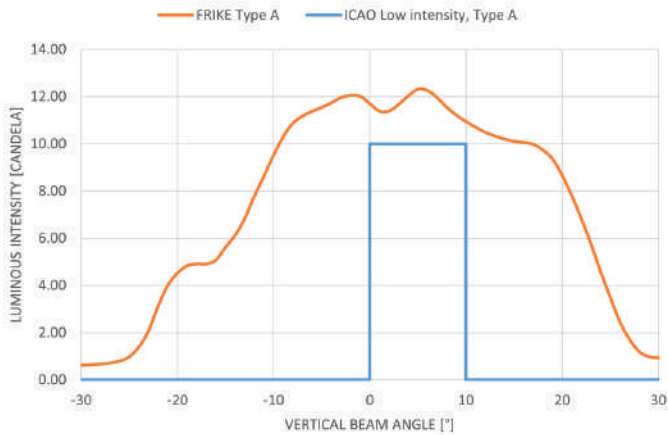

Type B & E

LIGHT DISTRIBUTION RED

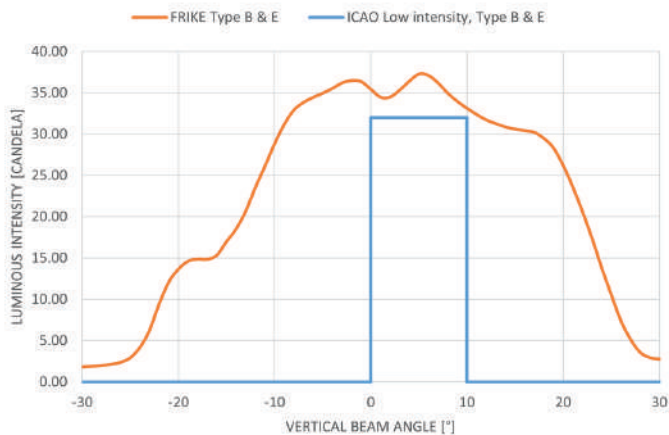

Accessories



Marking tarpaulin

Article no: 10-089



Automatic twilight control

Article no: 10-096



Mounting set plastic tube

Article no: 10-082R



Magnetic holder with safety rope

Article no: 10-082M



Marking balloon

Article no: 10-098

Optional

- Integrated twilight switch
- Mounting options:
 - Plug-in mounting on Ø 24mm tube
 - Universal tube adapter up to Ø 82mm
 - Screw angle
 - Magnetic holder with safety rope
 - Mounting tube Ø 42mm



Verkehrstechnik
Technique du trafic
Traffic Control Engineering



Contact us

FRIKE electronic AG
Signalstreet 1, 8194 Hüntwangen
Switzerland
+41 44 869 23 44, info@frike.ch
www.frike.ch