

ICAO Obstacle Light Crane Light (FOCA)

Article no: 10-082

Low-intensity

Red (LED) permanent light
Infrared (IR) flashing integrated

Low-intensity special

Red (LED) and Infrared (IR)
flashing integrated



Technical data

Dimension (ØxH):	158mm x 273mm
Weight:	1.5kg
Protection:	IP54
Operating voltage:	110 - 230VAC / 12VDC / 24VDC
Current consumption:	50mA (230VAC) / 290mA (12VDC)
Synchronization:	GPS
Cable length:	5m

Red (LED)

Luminous intensity:	12cd
Wavelength:	623nm

Infrared (LED)

Beam density:	580mW/sr
Wavelength:	850nm
Flash frequency:	0,5Hz (30/min); einstellbar

Regulations:	ICAO, Annex 14, Chapter 6 FOCA, AD I-006 D, Guidelines Aeronautical Obstructions EMC (IEC 61000-6-3, IEC 61000-6-2)
--------------	--

Characteristics

- Automatic GPS synchronization
- Cost-effective
- Weather resistant
- Easy to assemble
- High impact resistant

Video:




ICAO

Light distribution


Red

LIGHT DISTRIBUTION RED

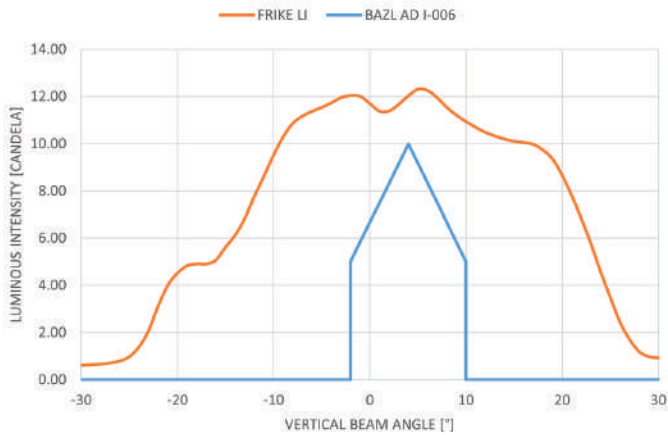

Infrared

LIGHT DISTRIBUTION IR

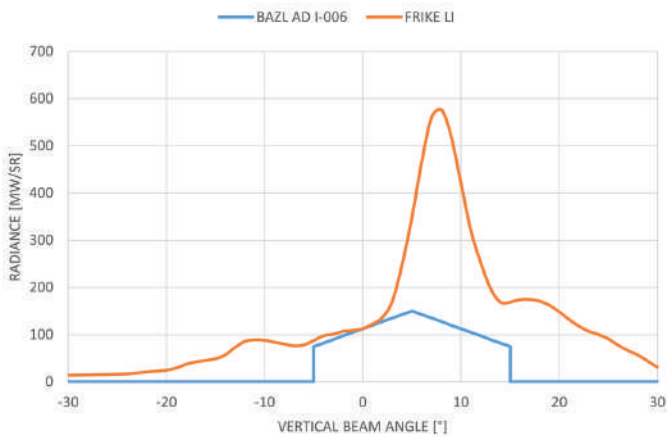

Accessories



Marking tarpaulin

Article no: 10-088



Automatic twilight control

Article no: 10-096



Mounting set plastic tube

Article no: 10-082R



Magnetic holder with safety rope

Article no: 10-082M



Marking balloon

Article no: 10-098



Solarpanel

Artikel-Nr.: 08-012

Optional

- Solar powered (self-sufficient)
- Integrated twilight switch
- Alarm contact in case of LED or power failure
- Mounting options:
 - Plug-in mounting on Ø 24mm tube
 - Universal tube adapter up to Ø 82mm
 - Screw angle
 - Magnetic holder with safety rope
 - Mounting tube Ø 42mm



Verkehrstechnik
Technique du trafic
Traffic Control Engineering



FRIKE electronic AG
Signalstrasse 1, 8194 Hüntwangen
Switzerland
+41 44 869 23 44, info@frike.ch
www.frike.ch